

FB LINE



nilpeter

*Your Starting Line for
High Performance*

FB LINE



FB-2500



FB-3300





FB-4200



Your Starting Line for High Performance



Competitive Value, Performance, and Durability

When maximum efficiency and low production costs are key, the FB-Line is the answer.

The Fastest in the Industry

These reliable narrow-web presses are based on modular flexo technology for easy configuration. Including screen and hot foil Drop-In features to increase your printing options at a very affordable price.

Available in 10", 13", and 16" web widths, the FB-Line is available as main shaft-driven or servo-powered presses. The maximum web speed is 750 feet per minute, making the FB-Line the fastest in the narrow-web industry. Exceptionally straightforward to make-ready and operate, the FB-Line is the ideal choice for high-quality, cost-effective printing.


A Positive Impact

With features such as the convenient splicing table with pneumatic clamping bars, ergonomic slide-out printing stations, easy-to-use operator interface, and advanced die-cutting and drying systems, the FB-Line will have a positive impact on your bottom line.



SPECIFICATIONS mm (feet/inches) FB-2500/FB-2500 S FB-3300/FB-3300 S FB-4200/FB-4200 S

Web width, max.	273 (10 ¾").....	350 (13 ¾").....	425 mm (16 ¾")
Printing width, max.	273 (10 ¾").....	350 (13 ¾").....	425 mm (16 ¾")
Printing lengths, min./max.	139,7-609,6 (5 ½"- 24").....	177,8-609,6 (7"- 24").....	177,8-609,6 mm (7"-24")
Press speed, max.	228 m/min. (750 FPM).....	228 m/min. (750 FPM).....	228 m/min. (750 FPM)
Repeat increments	3,175 (1/16" CP).....	3,175 (1/16" CP).....	3,175 (1/16" CP)
Reel diameter, unwind, max.	1016 (40").....	1016 (40").....	1016 mm (40")
Reel diameter, rewind, max.	1016 (40").....	1016 (40").....	1016 mm (40")

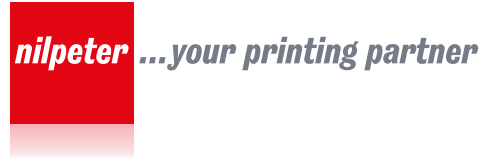

nilpeter ...your printing partner

nilpeter.com

FB/GB/082015